

ADDITIONAL PRODUCTS - DUMP SPREADER

ALL-HYDRAULIC DUMP SPREADER

Part Number: DSW-270

Package Includes: Dump Spreader, Electronic Flow Control, Quick Mount Hitch, Support Stand, Built-In Splash Guard, Rims & Tires

The Dump Spreader is the first all-hydraulic spreader on the market today. Its simple design concept and versatility make it the obvious solution when hauling and spreading liquid or semi-liquid materials.

The simple electronic control allows operation from the comfort of the cab. Adjust the dial to regulate the dump speed in rela-

tion to the speed of the expellers for an aggressive and consistent spreading pattern.

Dual action expellers scoop and spread material approximately 20'. This hydraulically powered system allows better shut off and prevents beater backlash. The box has a smooth interior and is continuously welded for strength, durability and no leaks. Material moves easily on the super-slick industrial grade finish for fast unloading.

There are **NO aprons, NO chains, NO seals, NO tracks, NO leaking and NO worries with the Dump Spreader.** It doesn't have a rear gate with seals or tracks that can leak, chains that can break or aprons that can freeze-up, even in the coldest of climates.

The Dump Spreader has a unique patented dump motion that centers the load over the wheel base. Unlike a dump truck, where the center of gravity moves out past the rear wheels, the spreader has a unique dump motion that utilizes hydraulic arms and cylinders with a high pivot mount to maintain a low center of gravity. As a result, the spreader remains balanced and steady over rough terrain.

It can be used for many applications, not just manure. It will work great as a dump box to haul snow, sand, wood chips, liquid tobacco waste, lime and more.

It quickly mounts on any 3-point hitch. The tongue has a built-in support stand that swings out of the way for transport. Struck capacity is 270 cu. ft. or 2000 gallons.

DUAL ACTION EXPELLERS

Dual action expellers are hydraulically driven to provide an aggressive & consistent spreading pattern

SOLID WESTENDORF CONSTRUCTION

Solid steel construction of box eliminates leaks, no aprons or chains to malfunction or break and no end gate seals to freeze up.

STANDARD SPLASH GUARD

Keeps material from splashing back at the tractor during transport.

TAPERED BOX DESIGN

Quick release of material with No-Drag tapered design.



QUICK MOUNTING


Heavy Duty 3-point mounting hitch keeps spreader level and offers a universal fit.

PATENTED DUMP MOTION

Unique patented dump motion keeps center of gravity low for steady operation over all types of terrain.

BUILT-IN STAND

Comes standard with sturdy support stand to store when not in use, and it swings out of the way for transport.

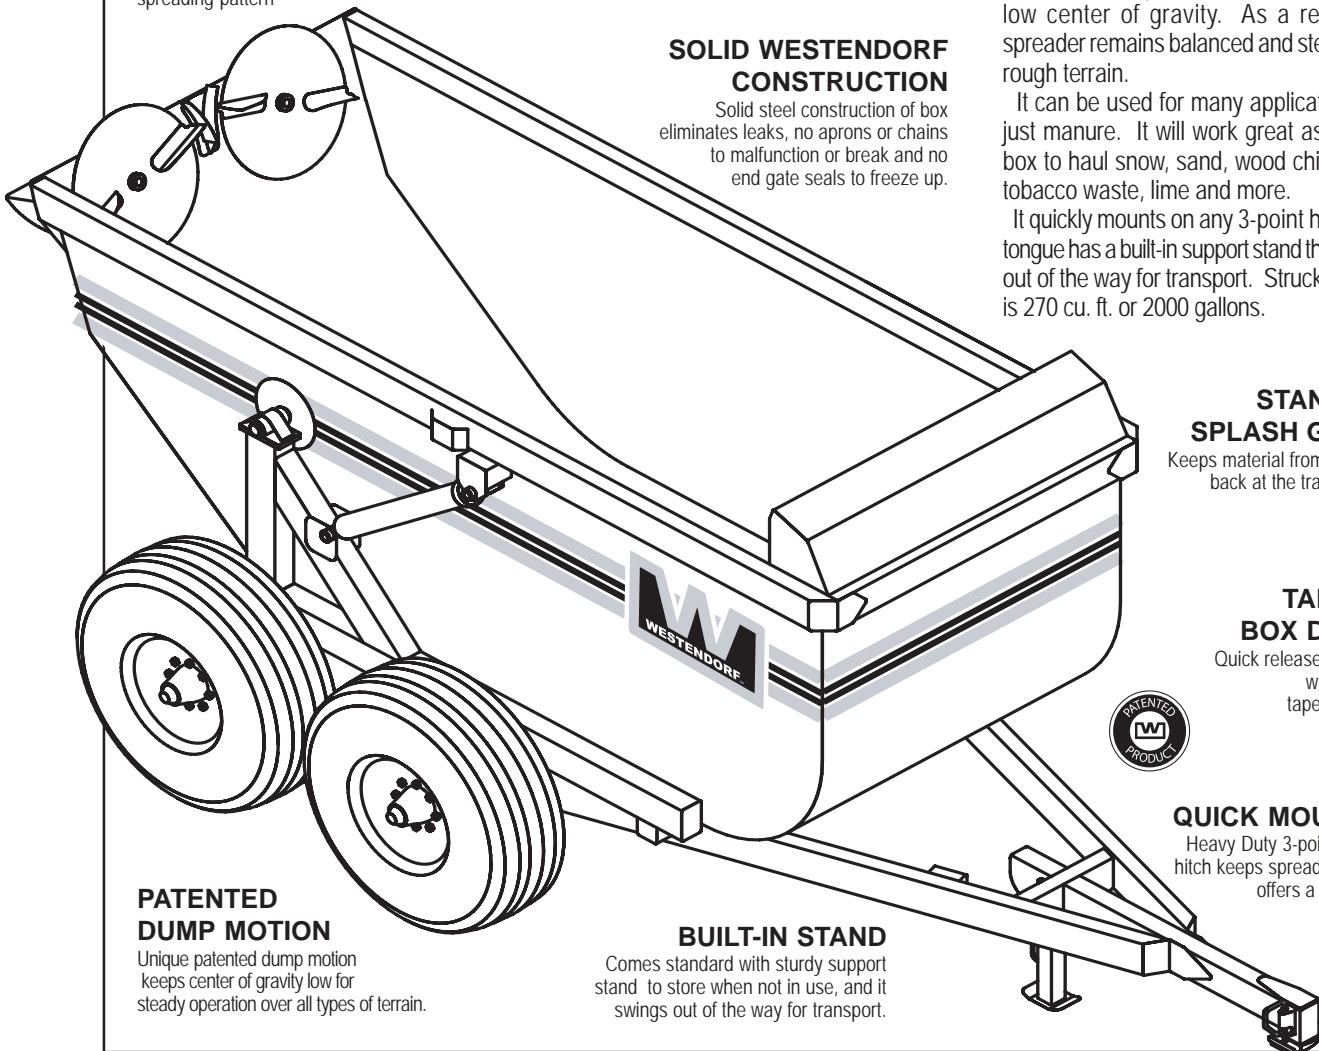

DIMENSIONS		DRIVE		CAPACITY	
Inside Box Width	60"	Minimum HP Req.	80 HP	Struck Cu. Ft.	270 cu. Ft.
Inside Box Depth	56 1/2"	Minimum Hydraulic g/m	10gpm	Struck Cu. Gallons	2000 gallons
Overall Height	87"	Expeller Speed	80 rpm at 10gpm	WEIGHT	
Overall Height (when tilted up)	174"	EXPELLER		Load (Max recommended)	12 tons
Overall Length	224"	Spread Width	20'		
Overall Width (w/tires shown)	102"	No. of Expellers	2		