



TA Series

Our expansive Traction Action (TA) product line includes a wide variety from Mid-Sized loaders to Super-Sized loaders designed to fit 2WD and 4WD tractors ranging from 10 HP to 240 HP. Nobody knows loaders like Westendorf. No matter what the need or which tractor you are trying to fit, Westendorf can fit you into a loader that's a cut above the rest. Just look at some of the key features that create the Westendorf advantage. Hydraulic Power-Mount™. Patented Snap-Attach™ Quick Change System. Custom adjust brackets. I-Beam construction. Level-Matic™. Low-Profile design for 4WD tractors. Hydra-Snap™ one-step coupling. Comfort Ride.



Steve Craig with Taco - Ashland, MO



"I am extremely happy with my Westendorf TA-26 loader. I have always bought other brands in the past, but they don't hold a candle to a Westendorf loader. I like it 100%!"

Powerful Traction Action Loaders

– raise the standards of performance

The mid-sized to super-sized loader series is designed for 2WD and 4WD tractors from 30 HP to 240 HP. Get that extra oomph you need at heights up to 17'4" and be able to stack what you want—where you want it—while maintaining the professional feel of a loader that fits properly.

Extras that “fit” your needs

How do you compare the true, overall performance and user conveniences of a loader. At Westendorf, we pay close attention to the small details and offer many custom features that make your overall loader experience user-friendly and hassle-free. Our customers' favorite features are standard in our loader packages and include items such as: Snap-Attach™, Power-Mount™, bigger quality built buckets and gauge rod. Add application specific extras

such as: a Back Drag Blade for added cylinder protection when doing dirt work, Hydra-Snap™ for quick loader to tractor connection when you share a loader between multiple tractors, or get self-locking chain hooks welded to the bucket at the factory. You can also upgrade the performance of your loader with larger cylinders, valve and joystick or rotational indicators that will monitor both the bucket position and loader position from the ground to the loader's full height. Ideal for frequent hay handlers.

FEEL and SEE the difference

Don't forget to ASK one of the most vital questions when you shop for a loader. How will the loader “look” on my tractor? Is it the right size? Don't settle for a loader that doesn't fit. A well fitting loader will feel like part of the tractor, not an extension of it. The loader shown below will have huge visibility issues. Its position on the tractor is too high, creating a tunnel. With nearly 40 loaders to choose from, we can select the right “size” loader for your tractor so you don't have to make sacrifices to get the power you need.



We put it where it counts!

It's not how much steel you can use to make the arm strong, but where you position the steel to maximize the arm strength to prevent unnecessary stress on the tractor.



Westendorf's “exclusive” arm design resists extra side forces that the four-wheel drive tractor introduces. The double tapered arm is designed with a unique internal I-beam inserted into the arm to create a double wall on the top and bottom of the arm. This puts the metal where it belongs, increasing lift capacity, arm strength and resistance to twisting. This concept allows you to lift higher capacity payloads, instead of hauling around a bulky heavy loader.

Westendorf wants you to SEE the difference

The superior fit of the Westendorf low-profile design keeps the loader out of your field of vision so you can see where you are going. The tailored uni-fit bracket system positions the loader in the best possible location, keeping the bucket closer to the front axle for additional stability and lower on the frame so you can “see” clearly while working.

#1 Reason—Power-Mount™

Hands down, it is the key reason why Westendorf owners love their loader. The true Power-Mount™ capability of a Westendorf loader lets the tractor do all the work. No pins to realign, no tools required, and no hassles. Go from feeding cattle to doing field work in just minutes. You won't even need a slab of concrete; just park it on any level grassy or gravel surface.



Hydra-Snap™ – The ideal power-mount companion

Connect the loader to the tractor in seconds with the Hydra-Snap™ one-lever hose coupling manifold. Just align the keyed plate and rotate the handle. It prevents hose mix ups and is a much “cleaner” alternative to connecting individual hoses. Also available with flat face couplers.

Snap-Attach™ – #2 Reason Why

The original system introduced to the market over 30 years ago. It's design consistency has withstood the test of time. It's the #2 reason (2nd only to Power-Mount) why customers love their Westendorf loader... change to a spear without any tools or extra trips off the tractor. Latches automatically when bucket cylinders are rolled back.

Handy

When you pair the right tools for the job with a top performing Westendorf loader, your operation will run smoother and more efficiently.



Uni-fit mounting system

Fine tune the loader's fit to a specific tractor with this bracket system. A loader that fits well is like your favorite pair of work gloves... they feel “good” and are comfortable during operation.

Quality Cylinders

Westendorf cylinders are manufactured to internal quality levels based on over 75 years experience. They're compact, lightweight and reliable. Metal piston rings with permaseal joints outperform plastic components in heavy-duty work environments year after year. Piston rods are chrome-plated above industry standards for more protection from rust, stroke wear and surface flaws. The cylinders are tested several times under both high and low pressure before delivery.



“...it was the biggest mistake I ever made!”

“Attention all farmers and ranchers, if you want a fantastic loader that slides on and off quickly, Westendorf is the loader for you. I used a WL-42 for years, parted with it, and got me a John Deere 740...biggest mistake I ever made!” The 740 didn't slide off like the Westendorf models. I will be selling my tractor with the 740 on it and getting a Westendorf to replace it. The 740 is a joke the way it comes on and off; I can't wait to have a Westendorf on the farm again! Just another satisfied Westendorf customer. Keep up the great job!”

Phil Beck - Nebraska



Stack Saver Auto Push-Off hay attachment...p. 117



How do I know if I need a self-leveling loader?

The key factor in determining whether to add a mechanical or hydraulic self-leveling kit has to do with what tasks you want to perform with your loader. If you handle hay or load pallets frequently, then yes - you'll appreciate a forklift that stays level as you raise the loader. Westendorf loader models offer either mechanical or hydraulic self-leveling options.

Custom options

Build a loader package to meet your material handling needs. Add items such as:

- Bigger buckets
- Chain hooks
- Back drag blade w/teeth
- Comfort Ride
- Custom tractor matching paint





TA-76

2WD up to 240 HP »
4WD up to 225 HP »
7475# at 15'2"

**A hay loader -
no doubt about it**

The TA-76 is the ultimate loader for feeders and hay users. With an amazing 15'2" lift height, this loader is built to last with double torsion tubes, 3" lift cylinder and big, 96" large capacity bucket. The TA-76 is a power loader built for the heavy-duty user; you can really dig, not just lift high with it. It has the wider frame for wider 70 series attachments.

TA-76 Base package:

- 3" Bucket Cylinders
- 3" Lift Cylinders
- Hydraulic Power-Mount™
- Snap-Attach™
- Mounting & Hose Kit
- MA-40 Hydraulic Manifold
- Bucket Gauge Rod
- 96" Large Capacity Bucket

Options:

- 3-1/2" Lift Cylinder Upgrade
- 108"-112" Buckets
- 3rd Steel Line
- Rotational Indicators
- Bucket Teeth
- Back Drag Blade
- Hydra-Snap™ Manifold
- Level UP Advantage
- Comfort Ride
- Precision Valve w/Regen Spool
- Precision Joystick
- Attachments (pp. 56-57)

Outstanding

Reach new heights with the high-lift loader series by Westendorf.



A



B



C



D

A - Pick up and handle 12 to 15 small square bales at one time. The high lift capabilities of the 70 series loaders and versatility of the bale handler is the perfect hay handling combination.

B - These rotational indicators speed up repetitive tasks. The BUCKET INDICATOR monitors the attachment's position from rolled back to fully dumped. The HEIGHT INDICATOR measures the loader's position from the ground to the full height.

C - Most high lift loaders on the market obstruct the operator's vision while driving or working. Westendorf high lift loaders sit lower on the hood and accommodate large tires with good turning radius.

D - Upgrade to the Hydra-Snap™ one-lever manifold. Ideal for frequent Power-Mount™ users. Available with flat face couplers.



Gentlemen,
I just attended the Farm Progress show. I want to comment on the equipment which you had displayed. I was impressed! I am a retired engineer with 12 patents and now go to shows to see what is new and where things are going with machinery. Most of the stuff is just bigger and more expensive. Your engineers are to be congratulated for some creative design work. Please give them a pat on the back from an old man who did some innovative work in his time, too. Congratulations!"

John Chapman

TA-77

2WD up to 240 HP »
4WD up to 225 HP »
9140# at 17'4"

Want more lift height? You got it!

The TA-77 offers all the benefits of the TA-76, and it adds an additional 2' of lift height. It's the highest in the industry. It comes with bigger lift cylinders for more power at greater heights. It is ideal for commercial hay operations with its great reach and 17'4" lift height.

TA-77

Base package:



- 3" Bucket Cylinders
- 3-1/2" Lift Cylinders
- Hydraulic Power-Mount™
- Snap-Attach™
- Mounting & Hose Kit
- MA-40 Hydraulic Manifold
- Bucket Gauge Rod
- 96" Large Capacity Bucket

Options:

- 108"-112" Buckets
- 3rd Steel Line
- Rotational Indicators
- Bucket Teeth
- Back Drag Blade
- Hydra-Snap™ Manifold
- Level UP Advantage
- Comfort Ride
- Precision Valve w/Regen Spool
- Precision Joystick
- Attachments. (pp. 56-57)

It's A Snap...

See and hear the adapter lock itself to the Snap-Attach™ coupler. It's simple, just roll back the bucket cylinders to Snap-Lock the attachment into place. See page 9 for details.

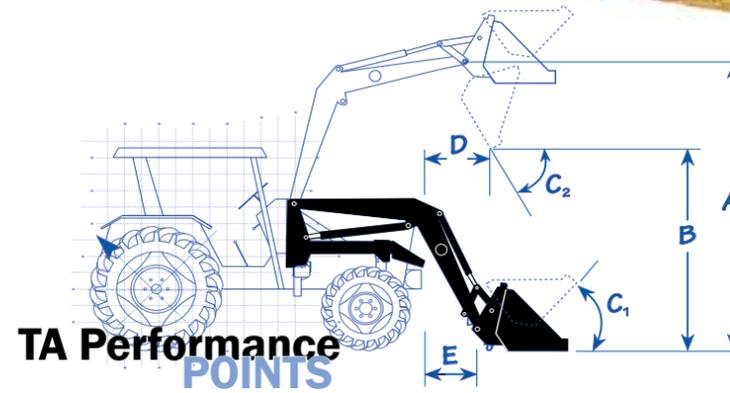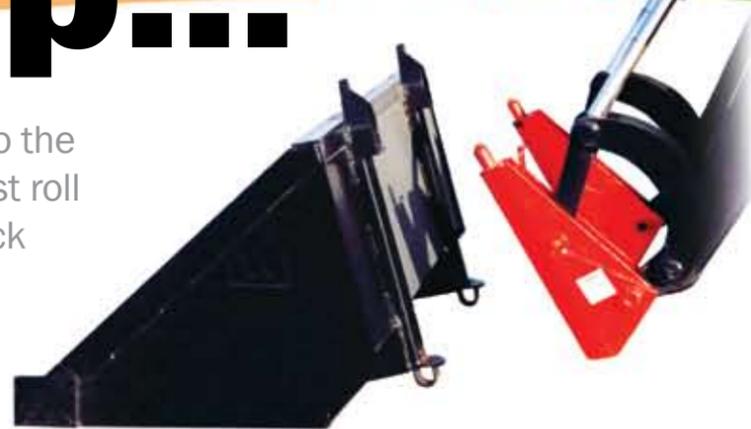

- A)** Lift Height
- B)** Clearance
- C₁)** Rollback **C₂)** Dump Angle
- D)** Reach at Max Height
- E)** Reach at Ground Level



TA Series Attachments

	DB-84	DB-96	DB-120	SBB-8	SBB-10	SBB-12	VP-72	VP-96	EB-34	FL-42 FL-48	BC-4000	BC-5000	BC-6000	BC-7000 BC-7700	BC-8000 BC-8800	
TA-25							●		●	●	●					(1)
TA-26/26+/26¹²	●			●				●	●	●		●	●			●
TA-28	●			●				●	●	●		●	●			●
TA-28+/29	●	●		●	●			●	●	●		●	●			●
TA-45/46/48	●	●		●	●			●	●	●		●	●			●
TA-76/77	●	●	●		●	●		●	●	●		●	●			●

	Z-47	GF-20	GF-28	GF-52	GF-51	GF-64	GF-84	GF-96	GF-184-3D	GF-32 TB-38	FB-42
TA-25										●	
TA-26/26+/26¹²		●								●	●
TA-28	●		●			●				●	●
TA-28+/29	●		●			●	(2)	(2)	(3)	●	●
TA-45/46/48	●			●	●	●	●	(2)	(3)	●	●
TA-76/77	●			●	●	●	●		(3)	●	●

(1) Requires skid-steer adapter (2) Requires 84" or 96" Large Capacity Bucket (3) Requires HDHC Bucket

	TA-25	TA-26/26+	TA-26 ¹²	TA-28	TA-28 +	TA-29	TA-45	TA-46	TA-48	TA-76	TA-77
Tractor HP Rating (approximate)	30-70 HP	30-90 HP	30-90 HP	up to 120	up to 135	up to 135	up to 130	up to 165	up to 185	up to 225	up to 225
A Full Height (ground to pin - feet/inches)	9' 4" / 112"	10' 5" / 125"	12' / 144"	13' 4" / 160"	13' 4" / 160"	13' 2" / 158"	13' 4" / 160"	13' 10" / 166"	14' 6" / 174"	15' 2" / 180"	17' 4" / 208"
B Clearance (bucket dump - inches)	97"	100"	119"	133"	133"	152"	127"	131"	136"	127"	170"
C₁ Rollback C₂ Dump Angle	20° 42°	27° 45°	27° 45°	24° 28°	33° 35°	35° 45°	34° 35°	29° 58°	34° 45°	34° 35°	29° 58°
D Reach at Max Height	28"	31"	36"	20"	20"	23"	21"	15"	28"	21"	15"
E Reach at Ground Level (to pin)	18"	19.5"	26"	23"	23"	23.5"	21"	22"	25"	24"	50"
	2500 psi 3000 psi	2500 psi 3000 psi	2500 psi 3000 psi	2500 psi 3000 psi	2500 psi 3000 psi	2500 psi 3000 psi	2500 psi 3000 psi				
Lift Capacity - AWC* (31.5" from pin)	3000 3600	3000 3600	3200 3480	4255 5106	4255 5100	5000 6000	4255 5100	4300 5100	4800 5760	4255 5100	5200 6240
Lift Capacity - at Pivot Pin	4395 5275	4395 5275	4680 5615	6230 7475	6230 7476	7325 8790	6230 7475	6300 7560	7030 8430	6230 7475	7620 9140
Lift Cylinder - Std Opt.	2-1/2" 3"	3"	3"	3"	3"	3"	3"	3"	3"	3" 3-1/2"	3-1/2"
Bucket Cylinder - Std Opt.	2-1/2" 3"	2-1/2"	2-1/2"	2-1/2"	3"	3"	3"	3"	3"	3"	3"
Bucket Sizes Available	60", 66", 72"	72", 84", SS	72", 84", SS	84", 84"LC, 90"	84", 84"LC, SS, 90", 96", HDHC	84", 84"LC, 90", 96", HDHC	84" LC, 90", 96", HDHC	84" LC, 90", 96", HDHC	84" LC, 90", 96", HDHC	96", 108", HDHC	96", 108", HDHC

LC- LARGE CAPACITY SS- SKID-STEER HDHC- HEAVY DUTY HIGH CAP.

*For additional information on AWC Capacity - see page 11. Note: Above specifications are based on ASABE S301.3 standard. Specifications may vary depending on make and model of tractor, front axle configuration, tire size, hydraulic system and type of attachment. Design specifications are subject to change without notice or obligation.

	SQ-80	SP-22	SP-43	SP-76	SP-42	SP-72	SP-74	SS-I	SS-II	BH-15	QT-72	BT-84
TA-25												
TA-26/26+/26¹²		●	●	●	●	●	●				●	
TA-28	●	●	●	●	●	●	●	●	●	●		●
TA-28+/29	●	●	●	●	●	●	●	●	●	●		●
TA-45/46/48	●		●	●	●	●	●	●	●	●		●
TA-76/77	●			●	●	●	●	●	●	●		●